



User's manual

www.vtechphones.com

Congratulations

on purchasing your new VTech product. Before using this telephone, please read the **Important safety instructions** on page 52 of this manual.

This manual has all the feature operations and troubleshooting necessary to install and operate your new VTech telephone. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature rich VTech product. For support, shopping, and everything new at VTech, visit our website at www.vtechphones.com.

In Canada, please visit www.vtechcanada.com.



The ENERGY STAR® program (www.energystar.gov) recognizes and encourages the use of products that save energy and help protect our environment. We are proud to mark this product with the ENERGY STAR® label indicating it meets the latest energy efficiency guidelines.

Table of contents

Getting started	Find handset
Parts checklist	Intercom
Telephone base and charger installation 2	Conference call
Battery installation and charging	Transfer an external call
Mounting bracket installation 4	Switch between external and
Handset layout 6	intercom call
Telephone base layout	Answer an incoming call during an intercom call
Telephone settings 8	
Ringer volume (handset) 8	Directory
Ringer tone	Store a directory entry
Key tone	Character chart
Language	Search the directory
Clear voice mail	Dial a directory entry
Telephone operation	Edit a directory entry
Make a call	Delete from the directory
Answer a call	About caller ID
	Call log
End a call	Missed calls indicator
Speakerphone	
Volume	Review the call log
Mute	Make a call log entry ready to dial
Ringer mute	Dial a call log entry
Call waiting	Save a call log entry to the directory
Chain dialing	Delete from the call log

Table of contents

Call log display screen messages	Record and play memos
Redial list	Record a memo
Dial a redial entry	Memo playback
Delete from redial	Call screening
Answering system	Call intercept
Answering system and voicemail	Message window displays
Message capacity	Remote access
Activate the answering system	Appendix
Set the clock	Handset display screen messages 47
Answering system setup	Handset and telephone base indicators 49
Set number of rings	Battery
Set telephone base ringer volume	Important safety instructions
Set remote access code	Troubleshooting
Set message alert tone	Operating range
Outgoing announcement	Maintenance
Play your announcement	About cordless telephones 63
Record your own announcement 41	The RBRC® seal
Delete your announcement 41	Warranty
New message indication	FCC, ACTA and IC regulations 66
Message playback	Technical specifications
Options during playback	Index
Delete all messages	

Parts checklist

Your telephone contains the following items. Save your sales receipt and original packaging in the event warranty service is necessary.



1. Quick start guide




2. Handsets

(2 for DS6121-2.


3 for DS6121-3.

4 for DS6121-4.

3. Telephone base bracket



with mounting



4. Chargers and charger adapters

(1 for DS6121-2. 2 for DS6121-3

3 for DS6121-4,

4 for DS6121-5/ DS6122-5)



5. Battery compartment covers

(2 for DS6121-2. 3 for DS6121-3. 4 for DS6121-4. 5 for DS6121-5/ DS6122-5)



6. Batteries (2 for DS6121-2. 3 for DS6121-3. 4 for DS6121-4. 5 for DS6121-5/ DS6122-5)



7. Telephone line cord



8. Telephone base power adapter

9. User's manual

User's manual

note

 To purchase replacement batteries or power adapters, visit our website at www. vtechphones. com or call 1 (800) 595-9511. In Canada, go to www.vtechcanada. com or call 1 (800) 267-7377.


note

- Use only the power adapter supplied with this product. To order a replacement, visit our website at www.vtechphones. com or call 1 (800) 595-9511. In Canada, go to www.vtechcanada. com or call 1 (800) 267-7377.
- The power units are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling or an under-the-table/ cabinet outlet.

Getting started

Telephone base and charger installation

Install the telephone base and charger as shown below. Make sure that the electrical outlet is not controlled by a wall switch. If you subscribe to Digital Subscriber Line (DSL) high-speed Internet service through your telephone line, you must have a DSL filter between the telephone base and the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

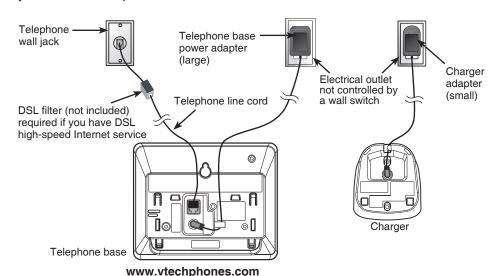


Battery installation and charging

Install the battery as shown below. After installing the battery, you might be able to make and receive short calls. For best performance, charge the handset for at least 16 hours before use. When the battery power is low, the handset will beep, display LOW BATTERY and [] will flash on the handset screen. Place the handset in the telephone base or charger to charge the battery when not in use. See the table on page 51 for battery operating times.

- 1. Insert the plug of the battery as indicated. Make sure it is plugged securely and matches the color-coded label inside the battery compartment.
- 2. Place the battery with the label THIS SIDE UP facing up and the wires inside the battery compartment.
- 3. Align the cover flat against the battery compartment, then slide it upwards until it clicks into place.
- 4. Charge the handset by placing it in the telephone base or charger. The handset charge light will be on when charging.













Charge light



note


- · If the handset will not be used for a long time. disconnect and remove the battery to prevent possible leakage.
- To purchase replacement batteries, visit our website at www. vtechphones. com or call 1 (800) 595-9511. In Canada, go to www.vtechcanada. com or call 1 (800) 267-7377.

Mounting bracket installation

Your telephone base comes with the mounting bracket installed for desktop use. If you prefer to mount your telephone on the wall (optional), it is designed to mount on a standard telephone wall plate.

Wall mounting bracket installation:

- 1. Slide the bracket down and away from the telephone base.
- 2. Tilt the top of the bracket down so that it rests on the base. Align the grooves on the bracket with the tabs on the base. See image 2 below.
- 3. Slide the bracket down until it clicks into place. See image 3 below.
- 4. Align the holes on the telephone base with the standard wall plate and slide down until the telephone is secure.

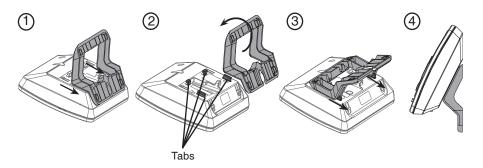



Mounting bracket installation (continued)

Desktop/tabletop bracket installation:

Your telephone comes ready for desktop use. If you have repositioned the bracket for wall mounting and now want to return to desktop use, follow the following steps:

- Remove the bracket from wall mount orientation by sliding it up towards the top of the base.
- 2. Tilt the top of the bracket up so that the lower portion of the bracket rests on the base. See image 2.
- 3. Slide the bracket up, onto the tabs towards the center of the telephone base until it clicks into place.

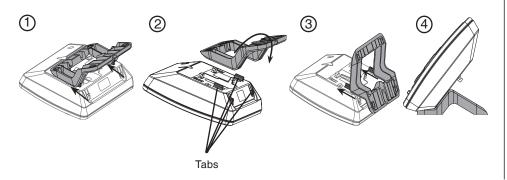

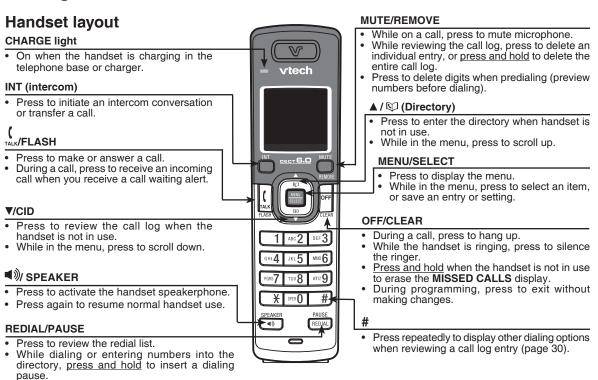

Telephone base layout

X/DELETE Message window · Press to delete message currently · Shows the status and number of playing (page 42). messages (page 45). · Press twice to delete all old **▶**/SKIP messages when the telephone is Press to skip to the next message not in use (page 43). (page 42). **≪**/REPEAT **▲**VOL+/▼VOL-· Press to repeat a message or Press to adjust the playback volume press twice to play back previous during playback (page 42). messages (page 42). ▶/■/PLAY/STOP FIND HANDSET · Press to play or stop messages · Press to page all handsets. (page 42). IN USE light ANS ON/OFF · Flashes when there is an incoming • Press to turn the answering system call or another telephone on the on or off (page 36). same line is in use. vtech **SET UP** · On when the handset is in use. · Press to enter to the set up menu RECORD (pages 37-39). • Press to record a memo (page 43) or an announcement **VOICEMAIL light** on the answering system (page 41). · Flashes when you have new voicemail. Voicemail CLOCK is offered by your telephone service provider. Press to set the clock (page 36). ANNC

· Press to enter announcement mode (pages

40-41).

note

 The ringer will be off if the volume is set to the lowest level, and a ringer off icon \(\hat{\mathbb{A}}\) will be displayed.

Telephone settings

Ringer volume (handset)

You can change the ringer volume to a comfortable level. The ringer can also be turned off so the telephone does not ring when there are incoming calls.


To adjust the ringer volume:

- Press VOL ▲ or VOL ▼ to select the desired ringer volume when the handset is not in use.
- When you stop pressing the volume buttons, the setting will be saved.

-OR-

- Press MENU/SELECT to display the menu when the handset is not in use
- Press ▲ or ▼ to select >RINGER VOLUME, then press MENU/SELECT.
- 3. Press ▲ or ▼ to adjust the volume. A sample of each ringer volume will be played when scrolling through the choices.
- Press MENU/SELECT to confirm your selection. You will hear a confirmation tone.

The telephone base ringer volume is set separately. See page 38 for details.







Telephone settings

Ringer tone

This menu allows you to choose from different ringer tones. To choose a ringer tone:

XINGER TONE KEY TONE

- 1. Press **MENU/SELECT** to display the menu when the handset is not in use.
- 2. Press ▲ or ▼ to select >RINGER TONE, then press MENU/SELECT.
- 3. Press ▲ or ▼ to select the desired ringer tone. A sample of each ringer tone will be played when scrolling through the choices.
- 4. Press **MENU/SELECT** to confirm your selection. You will hear a confirmation tone.

RINGER TONE

note

· If the ringer volume is turned off while scrolling through the options in the RINGER TONE menu, the sample of the ringer will not be heard.

Telephone settings

Key tone

The handset will beep when you press any handset key. You may turn the key tone on or off. To change the setting:

 Press MENU/SELECT to display the menu when the handset is not in use. XEY TONE LANGUAGE

- 2. Press ▲ or ▼ to select >KEY TONE, then press MENU/SELECT.
- 3. Press ▲ or ▼ to choose ON or OFF.
- Press MENU/SELECT to confirm your selection. You will hear a confirmation tone

KEY TONE

Language

You can select **ENGLISH**, **FRANÇAIS** or **ESPAÑOL** to be used in all screen displays. To change the setting:

 Press MENU/SELECT to display the menu when the handset is not in use. >LANGUAGE CLR VOICE MAIL

- 2. Press ▲ or ▼ to select >LANGUAGE, then press MENU/SELECT.
- 3. Press ▲ or ▼ to scroll through the choices.
- Press MENU/SELECT to confirm your selection. You will hear a confirmation tone.

LANGUAGE ENGLISH

Telephone settings

Clear voice mail

If you subscribe to voicemail service offered by your telephone service provider, **NEW VOICE MAIL** and will appear on the handset, and the **VOICEMAIL** light on the telephone base will flash when you have new voicemail messages. Please contact your local telephone company for more information and assistance about using your voicemail service.

After you have listened to all new voicemail messages, the indicators on both the handset and telephone base will be turned off automatically.

Use the clear voicemail feature when the telephone indicates that there is new voicemail but there is none (for example, when you have accessed your voicemail from a different telephone line while away from home). Clearing the voicemail waiting indicator only turns off the indicators; it does not delete your voicemail message(s). If there actually are new voicemail messages, your local telephone company will continue to send the signal which will turn the indicators back on.

To manually turn off these indicators:

- Press MENU/SELECT to display the menu when the handset is not in use.
- Press ▲ or ▼ to select >CLR VOICE MAIL, then press MENU/SELECT. The screen displays TURN INDICATOR OFF?
- Press MENU/SELECT to confirm your selection. You will hear a confirmation tone.



TURN INDICATOR OFF?

note

 The telephone service provider may alert you to new messages with a stutter (broken) dial tone. Contact your service provider for details.

note


- The screen displays the elapsed time as you talk (in hours, minutes and seconds).
- When predialing (preview numbers before dialing), press

press
MUTE/REMOVE
or OFF/CLEAR
to backspace and
delete;
press and hold
REDIAL/PAUSE
to insert a dialing
pause.

Telephone operation

Make a call

- 1. Press \(\frac{1}{1}\) FLASH or \(\pi\)\\SPEAKER
- 2. Dial the number.
 - -OR-
- 1. Dial the number.
- 2. Press ⁽√FLASH or ¶)/SPEAKER.



Answer a call

Press ¹_{TALK}/FLASH, ■)/SPEAKER or any of the dialing key (0-9, #, *).

End a call

• Press **OFF/CLEAR** or put the handset in the telephone base or charger.


Speakerphone

During a call, press **◄)/SPEAKER** to switch between speakerphone and normal handset use.

Volume

During a call, use the volume buttons on the right side of the handset to adjust the listening volume.

 Press VOL ▲ or VOL▼ to adjust the listening volume to a comfortable level.



Mute

The mute function allows you to hear the other party while the other party cannot hear you.

- During a call, press MUTE/REMOVE on the handset. MUTED will be temporarily displayed on the screen, along with the smaller MUTE icon.
- Press MUTE/REMOVE again to resume the conversation. MICROPHONE ON will be temporarily displayed on the screen.

REMOVE REMOVE GID CLEAR



Ringer mute

You can mute the ringer temporarily when the telephone is ringing.

 Press OFF/CLEAR or MUTE/REMOVE to temporarily silence the ringer. The next call will ring normally.





Call waiting

If you subscribe to call waiting service from your telephone company, you will hear an alert tone if there is an incoming call while you're on another call. Press TALK/FLASH to answer the new incoming call. Press TALK/FLASH again to return to the original call.

note

 Chain dialing can be useful if you wish to access numbers other than phone numbers (such as bank account information or access codes) from the directory, call log or redial list.

Telephone operation

Chain dialing

This feature allows you to initiate a dialing sequence from numbers stored in the directory, call log or redial list while you are on a call.

To access a number in the directory:

- 1. Press **MENU/SELECT** twice to enter the directory menu.
- 2. Scroll by pressing ▲ or ▼ to find the desired entry.
- 3. Press **MENU/SELECT** to dial the desired number when it is displayed.

To access a number in the call log:

- 1. Press MENU/SELECT and then press ▼ to select >CALL LOG.
- 2. Press MENU/SELECT to confirm.
- 3. Scroll by pressing ▲ or ▼ to find the desired entry.
- 4. Press **MENU/SELECT** to dial the desired number when it is displayed.

To access the last number in the redial list:

- Press REDIAL/PAUSE to dial.
- Press REDIAL/PAUSE again within two seconds to cancel the chain dialing.

Find handset

This feature allows the telephone base to page all the handsets.

- Press FIND HANDSET on the telephone base. All the handsets will ring and the screens display ** PAGING **.
- 2. Press ¬ALK/FLASH, NSPEAKER or any dialing key (0-9, #, *) on the handset; or press FIND HANDSET on the telephone base to end paging.



** PAGING **

Intercom

The intercom feature allows conversation between two registered handsets of the same system.

Model DS6121-2

- 1. Press **INT** on the originating handset when the handset is not in use and its screen displays **CALLING OTHER HANDSET**.
- 2. The destination handset rings and its screen displays OTHER HANDSET IS CALLING.
- 4. To end an intercom call, press **INT**, **OFF/CLEAR** or place the handset back in the telephone base or charger.

Models DS6121-3/DS6121-4/DS6121-5/DS6122-5

- 1. Press **INT** on the originating handset when the handset is not in use. The screen displays **INTERCOM TO**:
- Use the dialing keys to select the destination handset. The originating handset screen displays CALLING HANDSET X.
- 3. The destination handset rings and its screen displays **HANDSET X IS CALLING**.
- 4. To answer the intercom call, press ¬ALK/FLASH, ③/SPEAKER, INT or any dialing key (0-9,#,*) on the destination handset.
- 5. To end an intercom call, press **INT**, **OFF/CLEAR** or place the handset back in the telephone base or charger.

CALLING OTHER: HANDSET

OTHER HANDSET IS CALLING

INTERCOM TO:

CALLING HANDSET X

HANDSET X IS CALLING

note

· If the destination handset does not answer the intercom call within 100 seconds, is in the directory, is in the call log. is on a call, or out of range. the originating handset screen will display **UNABLE TO CALL TRY AGAIN** and return to idle mode.

Conference call

You can have a conference call with an external line and two registered handsets. When one handset is on the line,

• Press ¬ALK /FLASH or ■)/SPEAKER on another handset to join the call.

-OR-

Model DS6121-2

- Press INT to initiate an intercom call and its screen displays CALLING OTHER HANDSET. The destination handset rings and its screen displays OTHER HANDSET IS CALLING.
- 2. After the destination handset has been answered, <u>press and hold</u> **INT** on the originating handset to let the destination handset join the call.

Models DS6121-3/DS6121-4/DS6121-5/DS6122-5

screen displays CALLING HANDSET X.

- 1. Press **INT** to initiate an intercom call. The screen displays **TRANSFER TO**:
- 2. Use the dialing keys to select the destination handset. The originating handset
- 3. The destination handset rings and its screen displays **HANDSET X IS CALLING**.
- 4. After the destination handset has been answered, <u>press and hold</u> **INT** on the originating handset to let the destination handset join the call.

Transfer an external call

You can transfer an external call from one handset to any other handset.

Model DS6121-2

 During a call, press INT to put the call on hold at the originating handset. Its screen displays CALLING OTHER HANDSET.



- 2. The destination handset rings and its screen displays OTHER HANDSET IS CALLING.



4. Now the party at the originating handset can have a conversation with the party at the destination handset. Both screens display **INTERCOM**.



5. Press **OFF/CLEAR** on the originating handset, or place it back in the telephone base or charger to transfer the external call to the destination handset. The originating handset displays **CALL TRANSFERED**.

If you wish to cancel call transfer during intercom mode and reconnect to the external call:

- Press [,/FLASH on the originating handset.
- -OR-
- Press OFF/CLEAR or INT on the destination handset, or place it back in the telephone base or charger.

note

 If the destination handset does not pick up the intercom call, the originating handset can return to the external call by pressing

TALK/FLASH,
OFF/CLEAR or
INT.

 If a call remains on hold for about 100 seconds, or if the destination handset is in the directory, in the call log, or out of range, the screen of the originating handset shows UNABLE TO CALL TRY AGAIN

and reconnects to

the external call

automatically.

Models DS6121-3/DS6121-4/DS6121-5/DS6122-5

- During a call, press INT to put the call on hold at the originating handset. The screen displays TRANSFER TO:
- Use the dialing keys to enter the destination handset number. The originating handset screen displays CALLING HANDSET X.
- The destination handset rings and its screen displays HANDSET X IS CALLING.
- 5. Now the party at the originating handset can have a conversation with the party at the destination handset. Both screens display **INTERCOM**.
- Press OFF/CLEAR on the originating handset, or place it back in the telephone base or charger to transfer the external call to the destination handset. The originating handset displays CALL TRANSFERED.

If you wish to cancel call transfer during intercom mode and reconnect to the external call:

- Press [,/FLASH on the originating handset.
- -OR-
- Press OFF/CLEAR or INT on the destination handset, or place it back in the telephone base or charger.

TRANSFER TO:

CALLING HANDSET X

HANDSET X IS CALLING

INTERCOM

Switch between external and intercom call

If you are on an external call and you wish to intercom another handset without disconnecting the external call:

Model DS6121-2

- During a call, press INT to put the call on hold at the originating handset. Its screen displays CALLING OTHER HANDSET.
- The destination handset will ring and its screen will display OTHER HANDSET IS CALLING.
- 3. To answer the call at the destination handset, press ¬\(\text{LLX}/\text{FLASH}, \neq \)\/SPEAKER, INT or any dialing keys (0-9, #, *) on the destination handset.
- 4. Now the party at the originating handset can have a conversation with the party at the destination handset. Both screens display **INTERCOM**.
- 5. Press **INT** repeatedly on the originating handset to alternate between the external call (outside call) and the intercom call.

Models DS6121-3/DS6121-4/DS6121-5/DS6122-5

- 1. During a call, press **INT** to put the call on hold at the originating handset. The screen displays **TRANSFER TO**:
- Use the dialing keys to enter the destination handset number. The originating handset screen displays CALLING HANDSET X.
- The destination handset will ring and its screen will display HANDSET X IS CALLING.
- 5. Now the party at the originating handset can have a conversation with the party at the destination handset. Both screens display **INTERCOM**.
- 6. Press **INT** repeatedly on the originating handset to alternate between the external call (outside call) and the intercom call.

Answer an incoming call during an intercom call

During an intercom call, there will be an alert tone signaling an incoming call.

- To answer the incoming call, press (FLASH and the intercom call will end automatically.
- To terminate the intercom call without answering the incoming call, press OFF/CLEAR on the handset.

Directory

The directory can store up to 50 entries. Each entry may have up to 30 digits for the phone number and 15 characters for the name.

- The directory can be accessed when the handset is not in use by pressing

 once or MENU/SELECT three times.
- The screen displays DIRECTORY EMPTY if there are no records in the directory.
- When the directory is full and you attempt to save an entry, the screen will display LIST FULL.
- If you attempt to save a number already stored in the directory, the screen will display ALREADY SAVED.
- Since the directory is shared by all the handsets, only one handset can review the directory at a time. If a handset attempts to enter the directory while another handset is already in the directory, NOT AVAILABLE AT THIS TIME will be displayed.
- If the telephone number in the directory exceeds 15 digits,
 * will be displayed in front of the telephone number. Press * to scroll towards the end of the telephone number or press # to scroll towards the beginning of the telephone number.

DIRECTORY EMPTY

LIST FULL

ELIZABETH JONES (* 180012345678

ELIZABETH JONES (* 800123456 #)

ELIZABETH JONES 123456789012 #)

note

 Saving or deleting a number on one handset will automatically update all other handsets.

Telephone operation

Store a directory entry

- 1. Press **MENU/SELECT** twice when the handset is not in use.
- Press ▲ or ▼ to select >STORE, then press MENU/SELECT.
 The screen displays ENTER NUMBER.
- 3. Use the dialing keys to enter the number.
 - Press MUTE/REMOVE to backspace and erase a digit.
 - Press and hold MUTE/REMOVE to erase the entire entry.
 - Press ▼ to move the cursor to the left or ▲ to the right.
 - Press and hold REDIAL/PAUSE to insert a dialing pause (p will be displayed).
 - OR-
 - Copy a number from the redial list by pressing REDIAL/PAUSE and then ▲, ▼ or REDIAL/PAUSE to scroll to the desired number. Press MENU/SELECT to copy the number.
- Press MENU/SELECT to move on to the name. The screen displays ENTER NAME.
- 5. Use the dialing keys (see the **Character chart** on page 23) to enter the name.
 - Press MUTE/REMOVE to backspace and erase a character.
 - Press and hold MUTE/REMOVE to erase the entire entry.
 - Press ▼ to move the cursor to the left or ▲ to the right.
 - Press # to insert a space.
- Press MENU/SELECT to confirm. You will hear a confirmation tone.

>DIRECTORY CALL LOG

>STORE REVIEW

ENTER NUMBER

ENTER NAME

Character chart

Use the dial pad and the chart below to enter a name (up to 15 characters). Each press of a particular key causes the characters to be displayed in the following order:

'	,					,			
Numberker	Characters by number of key presses								
Number key	1	2	3	4	5	6	7	8	9
1	1	#	,	,	-		&		
2	А	В	С	2	а	b	С		
3	D	E	F	3	d	е	f		
4	G	Н	I	4	g	h	i		
5	J	К	L	5	j	k	ı		
6	М	N	0	6	m	n	О		
7	Р	Q	R	S	7	р	q	r	S
8	Т	U	V	8	t	u	v		
9	W	Х	Υ	Z	9	w	х	у	z
0	0								
*	*	?	!	/	()	@		
#	space								

- Press **MUTE/REMOVE** to backspace and erase when entering characters.
- Press and hold MUTE/REMOVE to delete the entire entry.

note

 When entering a name in the directory, the first letter of each word will be capitalized automatically.

Search the directory

Entries are sorted alphabetically.

To search the directory:

- Press ♥ once or MENU/SELECT three times to enter the directory.
- 2. Press ▲ or ▼ to scroll through the directory.

To start an alphabetical search:



>REUIEW

STORE

- Press once or MENU/SELECT three times to enter the directory.
- 2. Use the dialing keys to enter the first letter associated with the name. For example, press 5 (JKL) once to find Jenny, twice to find Kristen, or three times to find Linda. If there is no name entry matching your search, the next closest matching entry in alphabetical order will be displayed. If necessary, press ▲ or ▼ to find the desired entry.

Dial a directory entry

- 1. Press once or **MENU/SELECT** three times to enter the directory.
- Press ▲ or ▼ to scroll to the desired entry, or use the alphabetical search to find it.
- 3. Press TALK/FLASH or ■)/SPEAKER to dial the entry.

Edit a directory entry

- 1. Press ♥ once or **MENU/SELECT** three times to enter the directory.
- Press ▲ or ▼ to scroll to the desired entry, or use the alphabetical search to find it.
- 3. Press **MENU/SELECT** to confirm your selection. The screen displays **EDIT NUMBER**.

EDIT NUMBER 595-9511_

- 4. Use the dialing keys to edit the number.
 - Press MUTE/REMOVE to backspace and erase a digit.
 - Press and hold MUTE/REMOVE to erase the entire entry.
 - Press ▼ to move the cursor to the left or ▲ to the right.
 - Press and hold REDIAL/PAUSE to insert a dialing pause (p will be displayed).
 - Copy a number from the redial list by pressing REDIAL/PAUSE and then ▲, ▼ or REDIAL/PAUSE to scroll to the desired number. Press MENU/SELECT to copy the number.
- Press MENU/SELECT to move on to the name. The screen displays EDIT NAME.



- 6. Use the dialing keys (see the **Character chart** on page 23) to edit the name.
 - Press MUTE/REMOVE to backspace and erase a character.
 - Press and hold MUTE/REMOVE to erase the entire entry.
 - Press ▼ to move the cursor to the left or ▲ to the right.
 - Press # to insert a space.
- 7. Press **MENU/SELECT** to save. You will hear a confirmation tone.

Delete from the directory

- 1. Press once or **MENU/SELECT** three times to enter the directory.
- Press ▲ or ▼ to scroll to the desired entry, or use the alphabetical search to find it.
- 3. Press MUTE/REMOVE to remove the desired entry. You will hear a confirmation tone.

About caller ID

The caller ID with call waiting feature in this telephone lets you see the name and telephone number of the caller before answering the call, even when you're on a call. These features require services provided by your local telephone company.

Contact your telephone company if:

- you have both caller ID and call waiting, but as separate services (you may need combined service);
- you have only caller ID service, or only call waiting service; or
- you do not subscribe to any caller ID or call waiting services, but wish to order them.

You can use this telephone with regular caller ID service, and you can use its other features without subscribing to either caller ID or combined caller ID with call waiting service. There may be fees for these services, and these services may not be available in all areas.

The caller ID features will work only if both you and the caller are in areas offering caller ID service, and if both telephone companies use compatible equipment.

note

- Due to regional service differences, the caller ID information may not be available for every incoming call. In addition, the callers may intentionally block their names and/or telephone numbers.
- For call log entries with numbers between 16 and 23 digits, in order to view the entire number you must save the entry to the directory. For information on saving call log entries to the directory, see page 31.

Telephone operation

Call log

If you subscribe to caller ID service, information about each caller will be displayed after the first or second ring. If you answer a call before the caller information appears on the screen, it will not be saved in the call log.

- The call log can store up to 50 entries. Each entry may have up to 24 digits for the phone number and 15 characters for the name. If the phone number has more than 24 digits, it will not be saved or displayed in the call log. If the phone number has more than 15 but fewer than 24 digits, only the last 15 digits will be shown. If the name is longer than 15 characters, only the first 15 characters will be shown and saved in the call log.
- HANDSET X XX MISSED CALLS
- You can review, redial, and copy an entry into the directory.
- Entries are displayed in reverse chronological order, i.e. from the most recent entry to the earliest entry.
- When the call log is full, the earliest entry is deleted to make room for new incoming call information.

CALL LOG EMPTY

- XX MISSED CALL(S) will be displayed if there are new call log entries (including missed and unreviewed calls).
- CALL LOG EMPTY will be displayed if there are no records in the call log.
- Since the call log is shared by all the handsets, only one handset can review the call log at a time. If a handset attempts to enter the call log while another handset is already in it, NOT AVAILABLE AT THIS TIME will be displayed.

Missed calls indicator

When the handset is not in use and there are unreviewed calls in the call log, its screen will display **XX MISSED CALL(S)**.

Each time a call log entry marked **NEW** is reviewed, the number of missed calls decreases by one.

When all the missed calls have been reviewed, the missed calls indicator will no longer display.

If you do not want to review the missed calls one by one, <u>press</u> and hold **OFF/CLEAR** to erase the missed calls indicator. All the entries will be considered old and kept in the call log.



UTECH 595-9511 3:45[™] 1∕<mark>62</mark>

Review the call log

- 1. Press CID when the handset is not in use.
- 2. Press ▲ or ▼ to browse through the call log.

-OR-

- 1. Press **MENU/SELECT** when the handset is not in use.
- Press ▲ or ▼ to select >CALL LOG.
- 3. Press MENU/SELECT.
- 4. Press ▲ or ▼ to browse through the call log.
- The name (if available), telephone number, date and time of all incoming calls are displayed on the screen.
- There will be an error tone when the list reaches the beginning or end of the call log.

VTECH 595-9511 3:45 ^{pm} 1/02



Make a call log entry ready to dial

Although the call log entries received have 10 digits (the area code plus the seven-digit number), in some areas, you may need to dial only the seven digits, or a 1 plus the seven digits, or a 1 plus the area code plus the seven digits. You can change the number of digits that you dial from or store in the call log.

While reviewing the call log, press # repeatedly to display different dialing options for local and long distance numbers before dialing or saving the telephone number in the directory. See the example on the right.

You may also press ${\bf 1}$ repeatedly to add or remove a ${\bf 1}$ in front of the telephone number before dialing or saving it in the directory. See the examples on the right.

When the number displayed is in the correct format for dialing, press ¬ALK/FLASH or ■ SPEAKER to call the number.

800-595-9511 1-800-595-9511 595-9511 1-595-9511

		1	1
	~~~ ~~	-	٠
1-	595-95	1	1
	~~~ ~~	•	•

```
800-595-9511
1-800-595-9511
```

Dial a call log entry

- When in the call log, press ▲ or ▼ to scroll to the desired entry.
- 2. Press talk/FLASH or **◄)/SPEAKER** to dial the entry.

Save a call log entry to the directory

- When in the call log, press ▲ or ▼ to scroll to the desired entry.
- 2. Press MENU/SELECT.
 - You can edit the phone number, if necessary. Make sure the number is in the correct dialing format for your area. Press MENU/SELECT when done.
 - Edit the name, if necessary. Press MENU/SELECT when done.
- Successful programming is indicated by SAVED on the handset display along with a confirmation tone.
 - If the entry is already saved in the directory before, the screen will display ALREADY SAVED.
 - If there is no caller ID information, the screen will display UNABLE TO SAVE.

SAVED

ALREADY SAVED

UNABLE TO SAVE

note

- Saving or deleting a number on one handset will automatically update all other handsets.
- See page 25 about editing names and numbers.

Delete from the call log

To delete one entry:

- When in the call log, press ▲ or ▼ to scroll to the desired entry.
- Press MUTE/REMOVE to delete the selected entry. You will hear a confirmation tone.

To delete all entries:

 When in the call log, <u>press and hold</u> MUTE/REMOVE to delete the entire call log. The screen displays DELETE ALL CALLS?



2. Press **MENU/SELECT** to confirm. You will hear a confirmation tone. If you change your mind, press **OFF/CLEAR** to cancel the deletion and return to the call log.

Telephone operation

Call log display screen messages


Displays:	When:
PRIVATE NAME	The caller is blocking the name information.
PRIVATE NUMBER	The caller is blocking the telephone number information.
PRIVATE CALLER	The caller is blocking the name and number information.
UNKNOWN NAME	This caller's name is unavailable.
UNKNOWN NUMBER	This caller's number is unavailable.
UNKNOWN CALLER	No information is available about this caller.

Telephone operation

Redial list

The telephone stores the five most recently dialed numbers on the redial list.

- When there are already five entries on the redial list, the earliest entry will be deleted to make room for the latest entry.
- Entries are displayed in reverse chronological order, i.e. from the latest entry to the earliest entry.



The redial list can be accessed by pressing **REDIAL** when in idle mode.

Dial a redial entry

- Press REDIAL, then press ▲, ▼ or REDIAL repeatedly to scroll to the desired number. You will hear an error tone when you reach the beginning or end of the redial list.
- 2. Press (rack/FLASH or ♥)/SPEAKER to dial the number.

Delete from redial

- Press REDIAL, then press ▲, ▼ or REDIAL repeatedly to scroll to the desired number.
- 2. Press MUTE/REMOVE to delete the selected entry. You will hear a confirmation tone.

Answering system and voicemail

Your telephone has both a digital answering system and voicemail indication. Voicemail is offered by your telephone service provider (fees may apply). Your telephone's answering system and voicemail indication are independent features, and each alerts you to new messages differently. For more information on the voicemail indicators, see page 9. To listen to your voicemail, you typically dial an access number provided by your telephone company, followed by a security code or PIN. To listen to messages recorded on your digital answering system, press */*/PLAY/STOP</code> button on the telephone base.

If you subscribe to caller ID/call waiting service through your telephone service provider, you can use your telephone answering system and voicemail together. Set your answering system to answer calls at least two rings earlier than your voicemail is set to answer. For example, set your voicemail to answer calls after six rings and set your answering system to answer after four rings. Some voicemail providers may program the delay before answering calls in seconds instead of rings; in this case allow six seconds per ring when determining the appropriate setting. By doing this, if you are on a call, or if the answering system is busy recording a message and you receive another call, the second caller can leave a voicemail message.

Message capacity

The answering system can record and store up to 99 messages. A message can be up to four minutes in length. The total storage capacity for the announcement, messages and memos is approximately 14 minutes. Messages will remain available for replay until they are deleted.

note

- If you have caller ID service, the clock will be set automatically with incoming calls, but you will need to make sure the year is correct. See Set the clock for instructions on how to set the year, time and day manually.
- Press and hold
 ▶/SKIP or
 ≪/REPEAT
 while setting the minutes or year to advance or decrease by increments of ten.

Answering system

Activate the answering system

The answering system must be turned on to answer and record messages. Press **ANS ON/OFF** to turn the answering system on or off. If the answering system is turned on, it will announce "Calls will be answered," and the **ANS ON/OFF** light will be on. If the answering system is turned off, it will announce "Calls will not be answered," and the **ANS ON/OFF** light will be off.



Set the clock

Prior to playing a message, the answering system announces when it was received. Before using the answering system, set the year, time and day, so that messages are dated correctly. If the clock is not set before new messages are recorded, the system will announce "Time and day not set" before each message is played to remind you to set the clock.

- 1. Press **CLOCK**. The system announces the clock setting (e.g. year, time and day), then announces: "To set the clock, press **CLOCK**."
- 2. Press **CLOCK**. The system announces the current year.
- 3. Press >/SKIP or </ri>
 REPEAT until the system announces the correct year, then press CLOCK. The system announces the current hour.
- 4. Press **>**/SKIP or **◄**/REPEAT until the system announces the correct hour, then press CLOCK. The system announces the current minute.

- 5. Press **>/SKIP** or **</ri>

 */SKIP or
 /REPEAT** until the system announces the correct minute, then press **CLOCK**. The system announces the current day.
- Press >/SKIP or
 REPEAT until the system announces the correct day, then
 press CLOCK. After a confirmation tone, the system announces the new clock
 setting and exits programming mode.

Answering system setup

The answering system uses voice prompts to guide you through feature setup. Press */=/PLAY/STOP anytime to save and exit the SETUP menu.

Set number of rings

This feature allows you to select the number of rings before the answering system answers. You can choose from two, four or six rings or toll saver. With toll saver selected, the answering system answers after two rings if you have new messages, and after four rings if you have no new messages.

To set the number of rings:

- 1. Press **SETUP** when the telephone is not in use. The system announces the current number of rings setting.
- 2. Press ►/SKIP or ≪/REPEAT until the system announces the desired setting, then press SETUP to save the setting and go to the next setting, or press ►/■/PLAY/STOP to save and exit setup mode.

Set number of rings (continued)

If you subscribe to caller ID/call waiting and voicemail service through your telephone service provider, you can use your telephone answering system and voicemail together. Set your answering system to answer calls at least two rings earlier than your voicemail is set to answer. For example, set your voicemail to answer calls after six rings and set your answering system to answer after four rings. By doing this, if you are on a call, or if the answering system is busy recording a message and you receive another call, the second caller can leave a voicemail message.

Set telephone base ringer volume

This feature allows you to select the telephone base ringer volume level. You can choose from **HI** (high), **OF** (off) or **LO** (low).

1. Press **SETUP** when the telephone is not in use until the system announces the telephone base ringer setting.

Press **>/SKIP** or **</**REPEAT until the system announces the desired telephone base ringer volume level, then press **SETUP** to save the setting and go to the next setting, or press **>/=/PLAY/STOP** to save and exit setup mode.

The handset ringer volume is set separately. See page 8 for details.

Set remote access code

A two-digit security code is required to access the answering system remotely from any touch tone telephone. The preset code is **19**. You can set the code from **10** to **99**.

To set the remote access code:

- 1. Press **SETUP** when the telephone is not in use until the system announces the remote access code setting.
- 2. Press ▶/SKIP or ≪/REPEAT to change the remote access code by one, or press and hold ▶/SKIP or ≪/REPEAT to change it by increments of ten. Press SETUP to save the setting and go to the next setting, or press ▶/■/PLAY/STOP to save and exit setup mode.

Set message alert tone

This feature programs the system to beep every 10 seconds to alert you of new messages. The tone will stop when all new messages have been reviewed.

To set the message alert tone:

- 1. Press **SETUP** when the telephone is not in use until the system announces the message alert tone setting.
- 2. Press ►/SKIP or </ri>
 /REPEAT to select on or off, then press SETUP to save the setting and go to the next setting, or press ►/■/PLAY/STOP to save and exit setup mode.

note

 The answering system must be turned on for the message alert tone to function.

Outgoing announcement

The outgoing announcement is the greeting callers hear when calls are answered by the answering system.

The telephone is preset with a greeting that answers calls with "Hello, please leave a message after the tone." You can use this preset announcement, or replace it with your own. While in the **ANNC** menu, press **ANNC** again to exit at anytime.

Play your announcement

- 1. Press **ANNC** when the telephone is not in use. The system will announce "Announcement. Press **PLAY** or press **RECORD**."
- 2. Press ►/=/PLAY/STOP to play. You can press ►/=/PLAY/STOP again to stop the playback.

Record your own announcement

- Press ANNC when the telephone is not in use and the system will announce "Announcement. Press PLAY or press RECORD."
- 2. Press **RECORD** and the system announces, "Record after the tone. Press **STOP** when you are done."
- 3. After the tone, speak towards the microphone at the bottom front of the telephone base from about nine inches away.
- 4. Press ►/■/PLAY/STOP when finished.
- 5. The answering system will automatically playback the newly recorded announcement. Press -- PLAY/STOP to stop the playback at anytime.
- 6. Press ►/■/PLAY/STOP again to replay the recorded announcement. Press **RECORD** to record again (follow steps 2 through 4) if desired. Press **ANNC** to exit programming mode.

Delete your announcement

- 1. Press **ANNC** when the telephone is not in use and the system will announce "Announcement. Press **PLAY** or press **RECORD**."
- 2. Press X/DELETE and the system will announce "Announcement deleted."

note

- Your announcement can be up to 90 seconds in length.
- Announcements shorter than two seconds will not be recorded.
- When your announcement is deleted, calls will be answered with the preset announcement.

note

- If the memory is full, the system will answer after 10 rings and announce, "Memory is full. Enter the remote access code."
- If the answering system is off, the system will answer after 10 rings and announce, "Please enter your remote access code."
- If the system has less than five minutes of recording time left, the remaining time will be announced.
- If F is flashing in the message window, the memory is full. You will have to delete some messages before new ones can be recorded.

Answering system

New message indication

The message display counter will flash when there are new answering system messages.

If the new message alert tone is turned on, the telephone base will beep every ten seconds when there are unreviewed messages.

Message playback

- 1. Press ►/■/PLAY/STOP to listen to messages.
- 2. Press ►/■/PLAY/STOP again to stop playback.

If you have new messages, you will hear only the new messages (oldest first). If there are no new messages, the system will play back all messages (oldest first).

When playback begins, the total number of messages is announced, followed by the day and time of the first message to be played.

Options during playback

- Press ▲VOL+/▼VOL- to adjust the speaker volume.
- Press »/SKIP to skip to the next message.
- Press */REPEAT to repeat the message currently playing. Press */REPEAT twice to listen to the previous message.
- Press X/DELETE to delete the current message. The system will advance to the next message.

Delete all messages

Press **X/DELETE** when in idle mode. The system will announce "To delete all old messages, press **DELETE** again." Press **X/DELETE** again. All previously heard messages will be erased.

Record and play memos

Memos are your own recorded messages used as reminders for yourself or others using the same answering system. They are saved, played back and deleted in the same way as incoming messages.

Record a memo

- Press RECORD when in idle mode. The system announces, "Record after the tone. Press STOP when you are done."
- 2. After the tone, speak towards the microphone at the bottom front of the telephone base from about nine inches away.
- Press ►/■/PLAY/STOP when finished recording. The system will announce "Recorded."

Memo playback

Press **/PLAY/STOP when in idle mode. See Options during playback on page 42 for other options.

note

- Only old messages can be deleted. Messages can only be deleted after they are played.
- "Memory is full," will be announced if you press RECORD when the memory is full.
- Each memo can be up to four minutes in length.
- Memos shorter than two seconds will not be recorded.

Call screening

You can listen at the telephone base to a caller leaving a message. However, if you want to silence the telephone base when messages are being recorded, set the telephone base volume to its lowest level (1). Remember to raise the volume in order to hear your messages during playback.

Call intercept

If you want to answer a call while a message is being recorded, press TALK/FLASH on the handset.

Message window displays

Window displays:	Descriptions:
0	No messages.
1-98	Total number of old message(s) recorded.
0-98 (flashing)	Total number of new and old message(s) recorded; or the telephone base may have lost and regained power.
99 & F (alternating)	Memory is full with total number of messages recorded.
1-99 (counting)	Elapsed time while recording memo or announcement (up to 90 seconds).
99 (flashing)	Recording time exceeds 99 seconds.
1-99 (flashing)	Current message number during new message playback.
1-99	Current message number during old message playback.
1-8	Current volume level while adjusting.
10-99	Current remote access code while setting.
02, 04, 06, tS	Current number of rings before answering while setting.
	System is answering a call, or the time and date are being set, or being accessed remotely.
(flashing)	System is being programmed or initialized.
HI, LO or OF	The telephone base ringer level while in setup mode.

note

- If no key is pressed after entering remote access, new messages will be played automatically. If there are no new messages, all old messages will be played automatically.
- Once the new messages have been played, the system will announce the help menu options. If no key is pressed within 20 seconds, the remote access call is automatically disconnected.
- When the answering system is turned off, the telephone will answer after 10 rings, and announce "Please enter your remote access code."

Answering system

Remote access

A two-digit security code is required to access the system remotely from any touch tone telephone. The preset code is **19**; see page 39 to change it.

- 1. Dial your telephone number from any touch tone telephone.
- 2. When the system answers and plays your announcement, enter the two-digit security code. If you have messages, the system will play them automatically.
- 3. You may also enter one of the following remote commands.

Command	Function
1	Play all messages.
2	Play only new messages.
3	Delete the current message (during playback).
33	Delete all messages.
4	Repeat the current message (during playback).
5	Stop.
*5	Hear a list of remote commands.
6	Skip to the next message (during playback).
*7	Record a new announcement.
8	End the call.
0	Turn the answering system on or off.

4. Hang up or press 8 to end the call.

ppendix

Handset display screen messages

ALREADY SAVED	The telephone number you have entered is already stored in the directory.
CALL LOG EMPTY	There are no call log entries.
CALLING HANDSET X (for DS6121-3/DS6121-4/DS6121-5/DS6122-5) CALLING OTHER HANDSET (for DS6121-2)	Calling another handset.
CONNECTING	The cordless handset is searching for the telephone base.
CHARGING	A handset with low battery has been placed in the telephone base or charger to recharge.
DIRECTORY EMPTY	There are no directory entries.
	You have just ended a call.
HANDSET X IS CALLING (for DS6121-3/DS6121-4/DS6121-5/DS6122-5) OTHER HANDSET IS CALLING (for DS6121-2)	Another system handset is calling.
INTERCOM	The handset is on an intercom call.
INCOMING CALL	There is an incoming call.
INTERCOM ENDED	The handset is terminating an intercom call.
LINE IN USE	A handset or another telephone on the same line is in use.
LIST FULL	The directory is full.
LOW BATTERY	The battery needs to be recharged.

Handset display screen messages

MICROPHONE ON	MUTE has been turned off and the person on the other end can hear you.
MUTED	The microphone is muted temporarily during a conversation.
NEW VOICE MAIL	There are new voicemail messages from the local telephone company.
NO LINE	There is no telephone line connected.
NO SIGNAL, CALL ENDED	Communication between handset and telephone base is lost during a call.
NOT AVAILABLE AT THIS TIME	One handset is already viewing the call log or directory and another handset attempts to review it.
OUTSIDE CALL	Connected to the external call during call transfer.
PAGING	The cordless handset locator has been activated.
PHONE	The handset is in use.
PLACE IN CHARGER	The battery is very low. The handset should be placed in the telephone base or charger.
RINGER MUTE	The ringer is muted temporarily during incoming call.
SAVED	Your operation has been saved.
SPERKER	The handset speakerphone is in use.
UNABLE TO CALL TRY AGAIN	You have attempted to make an intercom call, but the handset you are calling is out of range or on an external call.
UNABLE TO SAVE	You are attempting to save caller ID entry with no name or number.

Handset display screen messages

WARNING CHECK BATTERY!	The battery is not installed or not installed properly in the handset. -OR - The battery needs to be replacedOR - An incorrect battery has been installed. Use only the supplied VTech battery or equivalent.
XX MISSED CALLS	There are unreviewed calls in your call log.

Handset and telephone base indicators Handset lights

1	On when the handset speakerphone is in use.
CHARGE	On when the handset is in the telephone base or charger and is charging.

IN USE	 Flashes when there is an incoming call or another telephone on the same line is in use. On when the handset is in use.
VOICEMAIL	Flashes when you have new voicemail. Voicemail is offered by your telephone service provider.
ANS ON/OFF	On when the answering system is on.

Handset and telephone base indicators Handset icons

MUTE	Microphone is muted.
\mathcal{D}	Ringer off.
NEW	New call log entries.
NEW VOICE MAIL ₩	New voicemail received from the local telephone company.
SPEAKER ()	In speakerphone mode.
Battery indicator	 Cycles (low, medium, and full) when the handset battery is charging. Flashes when the battery is low and needs charging. Displays solid when the battery is fully charged.

Battery

It takes up to 16 hours for the battery to be fully charged. When it is fully charged, you can expect the following performance:

Operation	Operating time
While in handset use (talking*)	Nine hours
While in speakerphone mode (talking*)	One and a half hours
While not in use (standby**)	Five days

^{*}Operating times are approximate. Your results may vary.

The battery needs charging when:

- A new battery is installed in the handset.
- · The handset beeps.
- LOW BATTERY is displayed and the battery indicator on the handset screen is flashing.

CAUTION:

To reduce the risk of fire or injury, read and follow these instructions:

- Use only the battery(ies) provided or equivalent. To order a replacement, visit our website at www.vtechphones.com or call 1 (800) 595-9511.
 In Canada, go to www.vtechcanada.com or call 1 (800) 267-7377.
- Do not dispose of the battery(ies) in a fire. They may explode. Check with local waste management codes for special disposal instructions.
- Do not open or mutilate the battery(ies). Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte
 may be toxic if swallowed.
- Exercise care in handling batteries in order not to create a short circuit with conductive materials such as rings, bracelets, and keys. The battery and/or conductor may overheat and cause burns.
- Charge the battery(ies) provided with or identified for use with this product only in accordance with the instructions and limitations specified in this manual.

WARNING:

TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO WATER OR ANY TYPE OF MOISTURE.

^{**}Handset is off the telephone base but not in use.

Important safety instructions

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- Read and understand all instructions.
- 2. Follow all warnings and instructions marked on the product.
- 3. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- 4. Do not use this product near water (for example, near a bathtub, kitchen sink, or swimming pool).
- 5. Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
- 6. Slots and openings in the back or bottom of the telephone base and handset are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register. This product should not be placed in any area where proper ventilation is not provided.
- 7. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
- 8. Do not allow anything to rest on the power cord. Do not install this product where the cord may be walked on.
- 9. Never push objects of any kind into this product through the slots in the telephone base or handset because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
- 10. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the telephone base or handset other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
- 11. Do not overload wall outlets and extension cords.
- 12. Unplug this product from the wall outlet and refer servicing to an authorized service facility under the following conditions:
 - A. When the power supply cord or plug is damaged or frayed.
 - B. If liquid has been spilled onto the product.
 - C. If the product has been exposed to rain or water.
 - D. If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operation instructions. Improper adjustment of other controls may result in damage and often requires extensive work by an authorized technician to restore the product to normal operation.
 - E. If the product has been dropped and the telephone base and/or handset has been damaged.
 - F. If the product exhibits a distinct change in performance.
- 13. Avoid using a telephone (other than cordless) during an electrical storm. There is a remote risk of electric shock from lightning.
- 14. Do not use the telephone to report a gas leak in the vicinity of the leak.
- 15. Only put the handset of your telephone next to your ear when it is in normal talk mode.
- 16. The power units are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling or an under-the-table/cabinet outlet.

If you have difficulty with your telephone, please try the suggestions below. For Customer Service, visit our website at www.vtechphones.com, or call 1 (800) 595-9511; in Canada, call 1 (800) 267-7377.

Problem	Suggestion
My telephone does not work at all.	 Make sure the battery is installed and charged correctly (page 3). For optimum daily performance, return the handset to the telephone base or charger after use. Make sure the power adapter is securely plugged into an outlet not controlled by a wall switch. Make sure the telephone line cord is plugged firmly into the telephone base and the telephone wall jack. Unplug the electrical power to the telephone base. Wait for approximately 15 seconds, then plug it back in. Allow up to one minute for the cordless handset and telephone base to synchronize. Charge the battery in the handset for up to 16 hours. Remove and re-insert the battery. If that still does not work, it may be necessary to purchase a new battery. Disconnect the telephone base from the telephone wall jack and plug in a working telephone. If the other telephone does not work, the problem is probably in the wiring or the local service. Call the local telephone company.
LOW BATTERY is displayed on screen.	 Place the handset in the telephone base or charger for recharging. Remove and re-install the battery and use it normally until fully discharged, then recharge the handset on the telephone base or charger for up to 16 hours. If the above measures do not correct the problem, the battery may need to be replaced.

Problem	Suggestion
The battery does not charge in the handset or the handset battery is not charging.	 Make sure the handset is placed in the telephone base or charger correctly. The CHARGE light on the handset should be on. Remove and reinstall the battery, then charge for up to 16 hours. If the handset is in the charger or in the telephone base but the CHARGE light on the handset is not on, refer to The CHARGE light is off in this section. It may be necessary to purchase a new battery. Please refer to the Battery section (page 51) of this user's manual.
The CHARGE light is off.	 Clean the charging contacts on the handset(s) and telephone base each month using a pencil eraser or a dry non-abrasive fabric. Make sure the power adapter and telephone line cords are plugged in correctly and securely. Unplug the power adapter. Wait for 15 seconds before plugging it back in. Allow up to one minute for the handset and telephone base to reset.
There is no dial tone.	 First, try all the above suggestions. Move the handset closer to the telephone base. It might be out of range. The telephone line cord might be malfunctioning. Try installing a new telephone line cord. Disconnect the telephone base from the telephone wall jack and connect a different telephone. If there is no dial tone on this telephone either, the problem is in your wiring or local service. Contact your local telephone company.

Problem	Suggestion
The telephone does not ring when there is an incoming call.	 Make sure the handset ringer volume is not set to zero (page 8) and the telephone base ringer volume is not set to off (page 38). Make sure the telephone line cord and power adapter are plugged in properly (page 2). The handset may be too far from the telephone base. Move it closer to the telephone base. There may be too many extension phones on the telephone line to allow all of them to ring simultaneously. Try unplugging some of them. If the other telephones in your home are having the same problem, the problem is in the wiring or local service. Contact the local telephone company (charges may apply). Other electronic products can cause interference to your cordless telephone. Try installing your telephone as far away as possible from the following electronic devices: wireless routers, radios, radio towers, pager towers, cellular telephones, digital telephones, intercoms, room monitors, televisions, VCRs, personal computers, kitchen appliances, and other cordless telephones. Test a working telephone at the telephone wall jack. If another telephone has the same problem, the problem is in the telephone wall jack. Contact your local telephone company (charges may apply). The telephone line cord might be malfunctioning. Try installing a new telephone line cord. Re-install the battery and place the handset in the telephone base. Wait for the handset to synchronize with the telephone base. Allow up to one minute for this to take place.

Problem	Suggestion
I cannot dial out.	 First, try all the above suggestions. Make sure there is a dial tone before dialing. It is normal if the handset takes a second or two to synchronize with the telephone before producing a dial tone. Wait an extra second before dialing. If the other telephones in your home are having the same problem, the problem is in the wiring or local service. Contact your local telephone company (charges may apply). Eliminate any background noise. Noise from a television, radio, or other appliances may cause the telephone not to dial out properly. If you cannot eliminate the background noise, first try muting the cordless handset before dialing, or dialing from another room in your home with less background noise.
My handset beeps and is not performing normally.	 Make sure the power cord is securely plugged into the telephone base. Plug the telephone base into a different working electrical outlet not controlled by a wall switch. Move the handset closer to the telephone base. It may be out of range. Reset the telephone base by unplugging the electrical power to the base. Wait for 15 seconds and plug it back in again. Allow up to one minute for the cordless handset and the telephone base to synchronize. Other electronic products can cause interference to your cordless telephone. Try installing your telephone as far away from these electronic devices as possible: wireless routers, radios, radio towers, pager towers, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and other cordless telephones.

Problem	Suggestion
There is interference during a telephone conversation.	 The handset may be out of range. Move it closer to the telephone base. Do you have DSL service? If yes, you need to have a DSL filter installed at every telephone wall jack that has a telephone connected to it (page 2). Contact your DSL service provider for filter information.
My calls fade out when I am using the cordless handset.	 Appliances or other cordless telephones plugged into the same circuit as the telephone base can cause interference. Try moving the appliance or telephone base to another outlet. Other electronic products can cause interference to your cordless telephone. Try installing your telephone as far away as possible from the following electronic devices: wireless routers, radios, radio towers, pager towers, cellular telephones, digital telephones, intercoms, room monitors, televisions, VCRs, personal computers, kitchen appliances, and other cordless telephones. If your telephone is plugged in with a modem or a surge protector, plug the telephone (or modem/surge protector) into a different location. If this doesn't solve the problem, re-locate your telephone or modem farther apart from each other, or use a different surge protector. The location of your telephone base can impact the performance of your cordless phone. For better reception, install the telephone base in a centralized location within your home or office, away from walls or other obstructions. In many environments, elevating the telephone base will improve overall performance. Disconnect the telephone base from the telephone wall jack and plug in a corded telephone. If calls are still not clear, the problem is probably in the wiring or local service. Contact your local service company (charges may apply).
	 If the other telephones in your home are having the same problem, the problem is in the wiring or local service. Contact the local telephone company (charges may apply).
I hear other calls when using the telephone.	Disconnect the telephone base from the telephone wall jack. Plug in a different telephone. If you still hear other calls, the problem is probably in the wiring or local service. Call your local telephone company.

Problem	Suggestion
I hear noise on the cordless handset, and none of the keys or buttons works.	Make sure the telephone line cord is plugged in securely.
My caller ID features are not working properly.	 Caller ID is a subscription service. You must subscribe to this service from your local telephone company for this feature to work on your telephone. The caller may not be calling from an area which supports caller ID. Both you and the caller's telephone companies must use equipment which are compatible with the caller ID service. The caller ID information will be displayed after the first or second ring. Caller ID data may not be displayed on your phone if you answer a call at or before the second ring. This would also apply to an answering device that answers the call at or before the second ring. If you subscribe to DSL service, install a DSL filter to the telephone line between the telephone base and the telephone line jack. Contact your DSL service provider for filter information.
The system does not receive caller ID or the system does not display caller ID during call waiting.	 Make sure you subscribe to caller ID with call waiting features provided by the local telephone company. The caller may not be calling from an area which supports caller ID. Both you and the caller's telephone companies must use equipment which are compatible with caller ID service. Caller ID data may not be displayed on your phone if you answer a call at or before the second ring. This would also apply to an answering device that answers the call at or before the second ring. If you subscribe to DSL service, install a DSL filter to the telephone line between the telephone base and the telephone line jack. Contact your DSL service provider for filter information.

Problem	Suggestion
Caller ID entries do not match the numbers I need to dial.	 Although the call log entries you receive have 10 digits, (the area code plus the seven-digit number), in some areas, you may need to dial only the seven digits, or a 1 plus the seven digits, or a 1 plus the area code plus the seven digits. You can change the number of digits that you dial from the call log. While reviewing the call log, press # repeatedly to display these dialing options for local and long distance numbers before dialing or saving the telephone number.
CONNECTING is shown in the handset display window. Why don't I get a dial tone when I try to use this telephone?	 The handset may be out of range. Move it closer to the telephone base. Make sure the power cord is securely plugged into the telephone base. Use a working electrical outlet that is not controlled by a wall switch. Reset your telephone by unplugging the power adapter from the telephone base. Disconnect the battery from the cordless handset. Wait for 15 seconds, then plug in the power adapter and re-install the battery. Place the handset in the telephone base and allow up to one minute for the handset and telephone base to synchronize. Other electronic products may prevent your handset and telephone base from communicating with each other. Try installing your telephone base as far away from these electronic devices as possible: wireless routers, radios, radio towers, pager towers, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and other cordless telephones.

Problem	Suggestion
The answering system does not answer after the number of rings to which I programmed it.	 Make sure the answering system is on. When the answering system is on, the red light on the ANS ON/OFF key should be lit. If toll saver is activated, the number of rings changes to two when there are new messages recorded (page 37). If the memory is full or if the answering system is off, the system will answer after ten rings. In some cases, the answering system will be affected by the ringing system used by the local telephone company.
The outgoing announcement is not clear.	 When recording the announcement, make sure you speak in a normal tone of voice about nine inches from the telephone base. Make sure there is no background noise (television, music, traffic, etc.) when recording.
The messages on the system are very difficult to hear.	Press VOL ▲ on the telephone base to increase the speaker volume.
The answering system does not record messages.	 Make sure the answering system is on. If the answering machine memory is full, it will not record new messages until some old messages are deleted.
The messages on the answering system are incomplete.	 If a caller leaves a very long message, part of it may be lost when the system disconnects the call after four minutes. If the memory on the system becomes full during a message, the system stops recording and disconnects the call. If the caller's voice is very soft, the system may stop recording and disconnect the call.

Problem	Suggestion
The answering system does not respond to remote commands.	 Make sure your remote access code is correct (page 39). Make sure you are calling from a touch-tone telephone. When dialing a number, there should be tones. If there are clicks, then it is not a touch-tone telephone and cannot activate the answering system. The answering system may not detect the remote access code when your announcement is playing. Wait until the announcement is over before entering the code. There may be interference on the telephone line you are using. Press the dial pad keys firmly when dialing.
Common cure for electronic equipment.	 If the telephone is not responding normally, try putting the cordless handset in the telephone base or the charger. If it does not respond, try the following (in the order listed): Disconnect the power to the telephone base. Disconnect the battery on the cordless handset. Wait a few minutes before connecting power to the telephone base. Re-install the battery and place the cordless handset in the telephone base or charger. Wait for the cordless handset to synchronize its connection with the telephone base. Allow up to one minute for this to take place.

Operating range

This cordless telephone operates with the maximum power allowed by the Federal Communications Commission (FCC). Even so, this handset and telephone base can communicate over only a certain distance - which can vary with the locations of the telephone base and handset, the weather, and the layout of your home or office.

When the handset is out of range, the handset will display CONNECTING...

If there is a call while the handset is out of range, it might not ring, or if it does ring, the call might not connect well when you press TALK/FLASH.

Move closer to the telephone base, then press **LLK/FLASH* to answer the call.

If the handset moves out of range during a telephone conversation, there might be interference.

To improve reception, move closer to the telephone base.

Maintenance

Taking care of your telephone

Your cordless telephone contains sophisticated electronic parts, so it must be treated with care.

Avoid rough treatment

Place the handset down gently. Save the original packing materials to protect your telephone if you ever need to ship it.

Avoid water

Your telephone can be damaged if it gets wet. Do not use the handset outdoors in the rain, or handle it with wet hands. Do not install the telephone base near a sink, bathtub or shower.

Electrical storms

Electrical storms can sometimes cause power surges harmful to electronic equipment. For your own safety, take caution when using electrical appliances during storms.

Cleaning your telephone

Your telephone has a durable plastic casing that should retain its luster for many years. Clean it only with a soft cloth slightly dampened with water or a mild soap. Do not use excess water or cleaning solvents of any kind.

Remember that electrical appliances can cause serious injury if used when you are wet or standing in the water. If the telephone base should fall into the water, DO NOT RETRIEVE IT UNTIL YOU UNPLUG THE POWER CORD AND TELEPHONE LINE CORDS FROM THE WALL. Then pull the unit out by the unplugged cords.

About cordless telephones

- Privacy: The same features that make a cordless telephone convenient create some limitations. Telephone calls are transmitted between
 the telephone base and the cordless handset by radio waves, so there is a possibility that the cordless telephone conversations could be
 intercepted by radio receiving equipment within range of the cordless handset. For this reason, you should not think of cordless telephone
 conversations as being as private as those on corded telephones.
- Electrical power: The telephone base of this cordless telephone must be connected to a working electrical outlet. The electrical outlet should not be controlled by a wall switch. Calls cannot be made from the cordless handset if the telephone base is unplugged or switched off, or if the electrical power is interrupted.
- Potential TV interference: Some cordless telephones operate at frequencies that may cause interference to televisions and VCRs. To
 minimize or prevent such interference, do not place the telephone base of the cordless telephone near or on top of a TV or VCR. If interference
 is experienced, moving the cordless telephone farther away from the TV or VCR will often reduce or eliminate the interference.
- Rechargeable batteries: This product contains either Nickel-cadmium or Nickel-metal hydride rechargeable batteries. Exercise care in handling batteries in order not to create a short circuit with conducting material such as rings, bracelets, and keys. The battery or conductor may overheat and cause harm. Observe proper polarity between the battery and the battery charger.
- Nickel-metal hydride rechargeable batteries: Dispose of these batteries in a safe manner. Do not burn or puncture the battery. Like
 other batteries of this type, if burned or punctured, they could release caustic material which could cause injury.

The RBRC® seal



The RBRC® seal on the nickel-metal-hydride battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC® program provides a convenient alternative to placing used nickel-metal-hydride batteries into the trash or municipal waste, which may be illegal in your area.

VTech's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized VTech product service centers. Please call **1-800-8-BATTERY**TM for information on Ni-MH battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

RBRC® is a registered trademark of Rechargeable Battery Recycling Corporation.

Warranty

What does this limited warranty cover?

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase ("Consumer" or "you") that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the United States of America and Canada.

What will VTech do if the Product is not free from defects in materials and workmanship during the limited warranty period ("Materially Defective Product")?

During the limited warranty period, VTech's authorized service representative will repair or replace at VTech's option, without charge, a Materially Defective Product. If we repair the Product, we may use new or refurbished replacement parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Repair or replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the repaired or replacement Products to you in working condition. You should expect the repair or replacement to take approximately 30 days.

How long is the limited warranty period?

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase. If VTech repairs or replaces a Materially Defective Product under the terms of this limited warranty, this limited warranty also applies to repaired or replacement Product for a period of either (a) 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original one-year warranty; whichever is longer.

What is not covered by this limited warranty?

This limited warranty does not cover:

- 1. Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, water or other liquid intrusion; or
- 2. Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of VTech: or
- 3. Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
- 4. Product to the extent that the problem is caused by use with non-VTech accessories: or
- 5. Product whose warranty/quality stickers, product serial number plates or electronic serial numbers have been removed, altered or rendered illegible; or
- 6. Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
- 7. Product returned without a valid proof of purchase (see item 2 below); or

Warranty

8. Charges for installation or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

How do you get warranty service?

To obtain warranty service in the United States of America, please call 1 (800) 595-9511. In Canada, please call 1 (800) 267-7377. NOTE: Before calling for service, please review the user's manual - a check of the Product's controls and features may save you a service call.

Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are responsible for delivery or handling charges incurred in the transport of the Product(s) to the service location. VTech will return repaired or replaced Product under this limited warranty. Transportation, delivery or handling charges are prepaid. VTech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, VTech will notify you and will request that you authorize the cost of repair prior to any further repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that are not covered by this limited warranty.

What must you return with the Product to get warranty service?

- 1. Return the entire original package and contents including the Product to the VTech service location along with a description of the malfunction or difficulty; and
- 2. Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model) and the date of purchase or receipt; and
- 3. Provide your name, complete and correct mailing address, and telephone number.

Other Limitations

This warranty is the complete and exclusive agreement between you and VTech. It supersedes all other written or oral communications related to this Product. VTech provides no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Product. There are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification.

State/Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritten warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase. Some states/provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special, incidental, consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Please retain your original sales receipt as proof of purchase. www.vtechphones.com

FCC, ACTA and IC regulations

FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this telephone.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The handset may be safely held against the ear of the user. The telephone base shall be installed and used such that parts of the user's body other than the hands are maintained at a distance of approximately 20 cm (8 inches) or more. If you choose to use a clipping device, please make sure to only use the supplied VTech belt clip.

This Class B digital apparatus complies with Canadian ICES-003.

FCC Part 68 and ACTA

This equipment complies with Part 68 of the FCC rules and with technical requirements adopted by the Administrative Council for Terminal Attachments (ACTA). The label on the back or bottom of this equipment contains, among other things, a product identifier in the format US: AAAEQ##TXXXX. This identifier must be provided to your local telephone company upon request.

The plug and jack used to connect this equipment to premises wiring and the telephone network must comply with applicable Part 68 rules and technical requirements adopted by ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. An RJ11 jack should normally be used for connecting to a single line and an

FCC, ACTA and IC regulations

RJ14 jack for two lines. See Installation Instructions in the user's manual.

The Ringer Equivalence Number (REN) is used to determine how many devices you may connect to your telephone line and still have them ring when you are called. The REN for this product is encoded as the 6th and 7th characters following the US: in the product identifier (e.g., if ## is 03, the REN is 0.3). In most, but not all areas, the sum of all RENs should be five (5.0) or less. For more information, please contact your local telephone company.

This equipment may not be used with Party Lines. If you have specially wired alarm dialing equipment connected to your telephone line, ensure the connection of this equipment does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

If this equipment is malfunctioning, it must be unplugged from the modular jack until the problem has been corrected. Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents. For repair procedures, follow the instructions outlined under the Limited Warranty.

If this equipment is causing harm to the telephone network, the telephone company may temporarily discontinue your telephone service. The telephone company is required to notify you before interrupting service. If advance notice is not practical, you will be notified as soon as possible. You will be given the opportunity to correct the problem and the telephone company is required to inform you of your right to file a complaint with the FCC. Your telephone company may make changes in its facilities, equipment, operation, or procedures that could affect the proper functioning of this product. The telephone company is required to notify you if such changes are planned.

If this product is equipped with a corded or cordless handset, it is hearing aid compatible.

If this product has memory dialing locations, you may choose to store emergency telephone numbers (e.g., police, fire, medical) in these locations. If you do store or test emergency numbers, please:

Remain on the line and briefly explain the reason for the call before hanging up.

Perform such activities in off-peak hours, such as early morning or late evening.

Industry Canada

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation.

The term "IC: " before the certification/registration number only signifies that the Industry Canada technical specifications were met.

The Ringer Equivalence Number (REN) for this terminal equipment is 0.1. The REN is an indication of the maximum number of devices allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the RENs of all the devices does not exceed five.

This product meets the applicable Industry Canada technical specifications.

Technical specifications

Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Handset: 1921.536-1928.448 MHz Telephone base: 1921.536-1928.448 MHz
Channels	5
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Size	Handset: 6.61in X 1.77in X 1.06in (168.0mm X 45.0mm X 27.0mm) Telephone base: 6.04in X 4.04in X 4.06in (153.5mm X 102.5mm X 103.0mm) Charger: 2.80in X 3.14in X 2.39in (71.0mm X 79.8mm X 60.8mm)
Weight	Handset: 5.29oz (150.0g) (including battery) Telephone base: 8.82oz (250g) Charger: 1.98oz (56.0g)
Power requirements	Handset: 2.4V DC 550mAh Ni-MH battery Telephone base: 6V DC @ 400mA Charger: 6V DC @200mA
Memory	Handset directory: 50 memory locations; up to 30 digits and 15 characters Handset call log: 50 memory locations; up to 24 digits and 15 characters

Index

Activate the answering system 36 Answer a call 12 Answer an incoming call during an intercom call 20 Answering system setup 37

В

Battery 3, 51

C

Call intercept 44 Call log 28 Call log display screen messages Call screening 44 Call waiting 13 Caller ID 27 Chain dialing 14 Character chart 23 Charger installation 2 Charging 3 Clear voice mail 11 Conference call 16 Cordless telephones 63

Delete messages from answering system 42, 43 Delete from redial 34 Delete from the directory 26 Delete from the call log 32 Delete your announcement 41 Desk mounting 5 Dial a call log entry 30 Dial a directory entry 24 Dial a redial entry 34 Directory 21 DSL filter 2

Edit a directory entry 25 End a call 12

FCC, ACTA and IC regulations 66 Find handset 14

Handset indicators 49 Handset layout 6 Handset display screen messages 47

Intercom 15

K

Key tone 10

Language 10

Index

M

Maintenance 62
Make a call 12
Make a call log entry ready to dial 30
Memo playback 43
Message capacity 35
Message playback 42
Message window displays 45
Missed calls indicator 29
Mounting bracket installation 4
Mute 13

Ν

New message indication 42

0

Operating range 62
Options during playback 42
Outgoing announcement 40

Р

Paging 14
Parts checklist 1
Play your announcement 40

R

RBRC® seal 63
Record and play memos 43
Record your own announcement 41
Redial list 34
Remote access 46
Review the call log 29
Ringer mute 13
Ringer tone 9
Ringer volume (handset) 8

S

Save a call log entry to the directory 31
Search the directory 24
Set message alert tone 39
Set number of rings 37
Set remote access code 39
Set telephone base ringer volume 38
Set the clock 36
Speakerphone 12
Store a directory entry 22
Switch between external and intercom call 19

Т

Technical specifications 68
Telephone base indicators 49
Telephone base installation 2
Transfer an external call 17
Troubleshooting 53

V

Voicemail 11 Volume 8, 12, 38

W

Wall mounting 4 Warranty 64 VTECH TELECOMMUNICATIONS LTD.
A member of THE VTECH GROUP OF COMPANIES.
Distributed in the U.S.A. by VTech Communications, Inc. Beaverton, Oregon
Distributed in Canada by VTech Technologies Canada, Ltd., Richmond, B.C.
Copyright ©2008 for VTECH TELECOMMUNICATIONS LTD.
Printed in China.

91-001513-060-100

